

Fig1

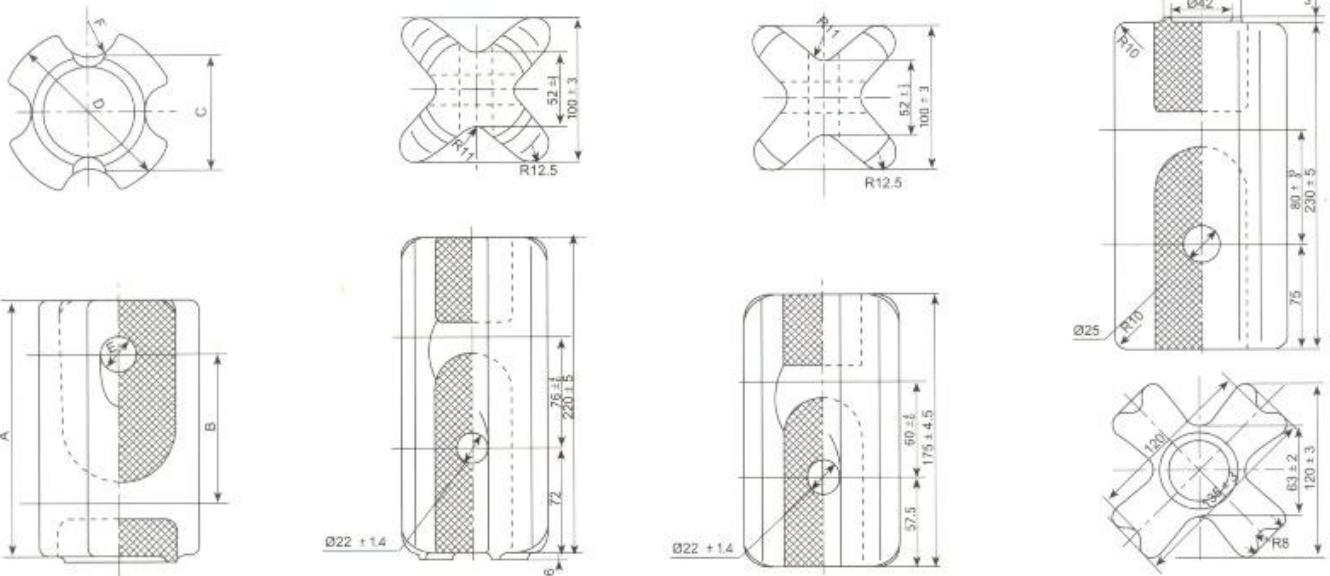


Fig2

X24

H24

11-3257G

PRINCIPALES DIMENSIONES Y DATOS ESTÁNDAR

Fig. No.	Tipo	Dimensiones principales (mm)						Distancia de fuga (mm)	Carga mecánica fallida (KN)	Frecuencia de poder voltaje de flashover (kV)		Peso (kg)
		UN	segundo	do	re	mi	F			Seco	Mojado	
1	11.1354	78	35	25	44	14		32	18	25	12	2
1	11.1075	95	57	37	50	19		48	45	30	15	4.9
1	11.0522	136	85	60	62	19		63	110	35	18	15.1
1	11.0521	190	85	60	72	25		63	110	40	23	20.6
2	PS10	59	35	25.5	39.5	8	6.5					
2	PS9 / 3	60	26	25.5	38	8	6.5					
2	NEF-2-60	60	28	25.5	38	10	6.5					
2	NEF-2-58	58	24	23	37	8	6					
2	40x55	55	27	22.5	40	12	8					