




Gato. No.	adecuado aislante	Pelota IEC código	dimensiones (mm)				clasificado carga de falla kN	Peso kg
			re	re	segundo	h_1		
Q-7	XP-7	16mmA.B	17	22	dieciséis	50	70	0.3
QP-7	XP-7	16mmA.B	17	20	dieciséis	50	70	0.3
QP-10	XP-10	16mmA.B	17	20	dieciséis	50	100	0.3
QP-12	XP-12	16 mm	17	20	dieciséis	50	120	0.3
QP-16	XP-16	20 mm	24	26	20	60	160	0.5
QP-21D	XP-21	20 mm	21	29	20	70	210	1.0
QP-20	XP-20	24 mm	25	30	24	80	200	1.0
QP-30	XP-30	24 mm	25	39	30	80	300	1.1

Gato. No.	adecuado aislante	dimensiones (mm)					clasificado carga de falla kN	Peso kg
		h_1	h_2	R	re	segundo		
QH-7	XP-7	114	57	11	17	dieciséis	70	0.6
QH-12	XP-12	120	63	11	17	dieciséis	120	0.7
QH-16	XP-16	130	70	13	26	20	160	1.0
QH-7A	XP-7	90	52	11	17	dieciséis	70	0.5

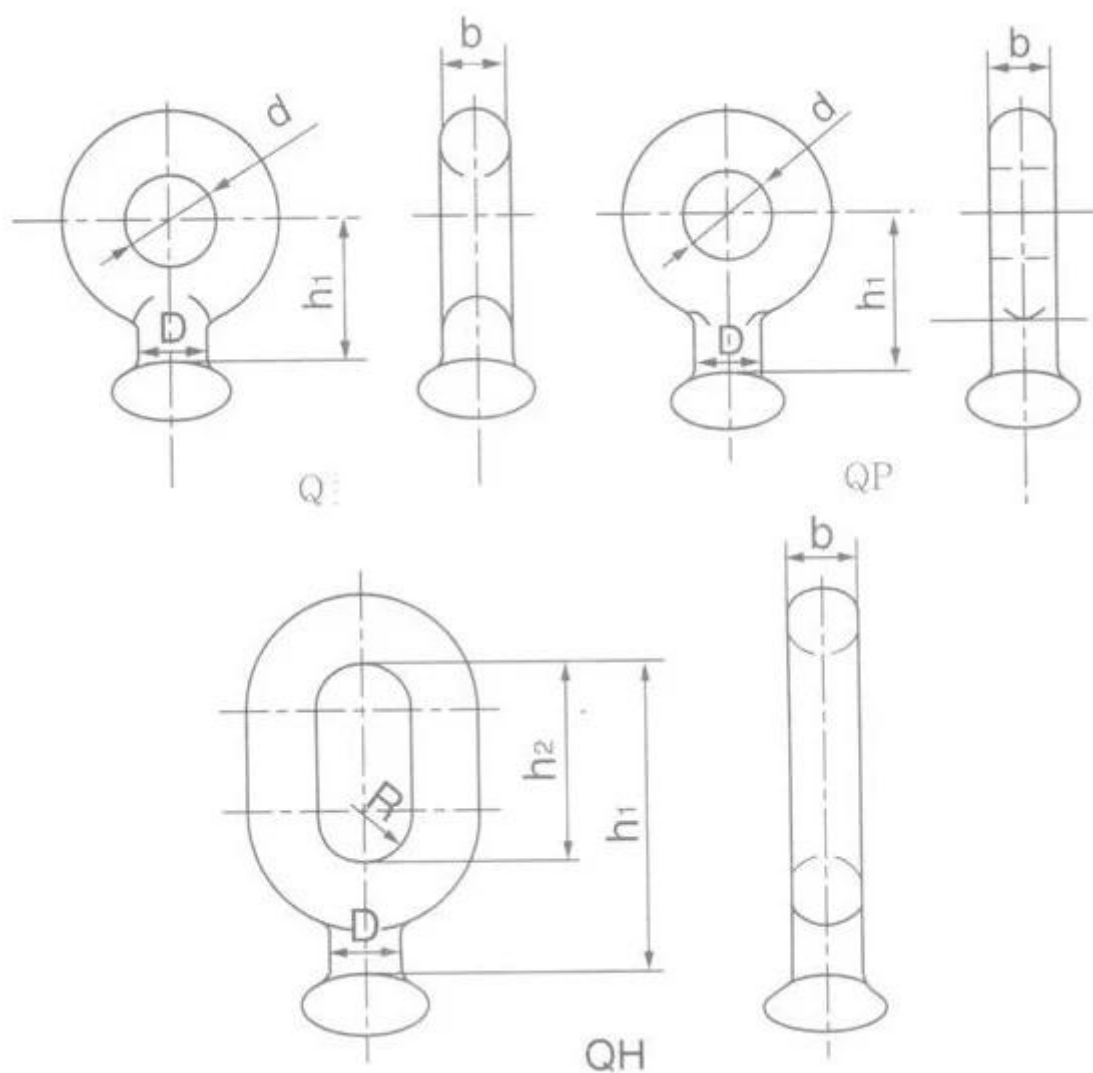