

Fig1

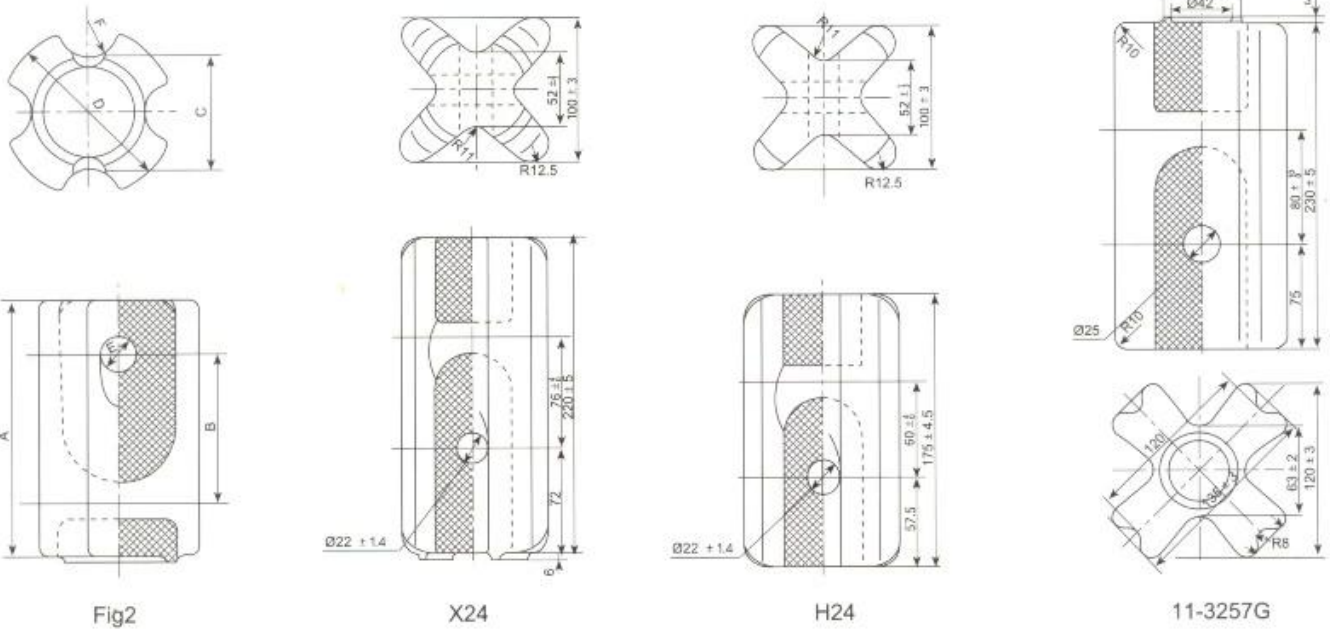


Fig2

X24

H24

11-3257G

DIMENSIONI PRINCIPALI E PARTICOLARI STANDARD

Fig. No.	genere	Dimensioni principali (Mm)						Distanza di dispersione (Mm)	Carico meccanico difettoso (KN)	Power-frequenza tensione del flashover (KV)		Peso (kg)
		UN	B	C	D	E	F			Asciutto	Bagnato	
1	11,1354	78	35	25	44	14		32	18	25	12	2
1	11,1075	95	57	37	50	19		48	45	30	15	4.9
1	11,0522	136	85	60	62	19		63	110	35	18	15.1
1	11,0521	190	85	60	72	25		63	110	40	23	20,6
2	PS10	59	35	25.5	39.5	8	6.5					
2	PS9 / 3	60	26	25.5	38	8	6.5					
2	NEF-2-60	60	28	25.5	38	10	6.5					
2	NEF-2-58	58	24	23	37	8	6					
2	40x55	55	27	22.5	40	12	8					