




VKS35-S

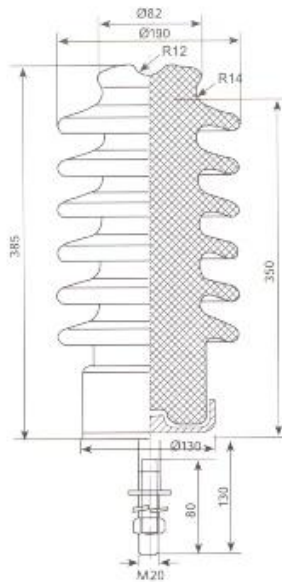

VKS35-N

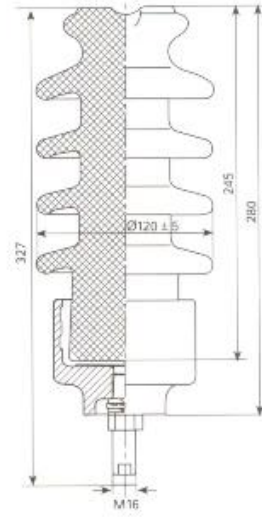

PS-15/500

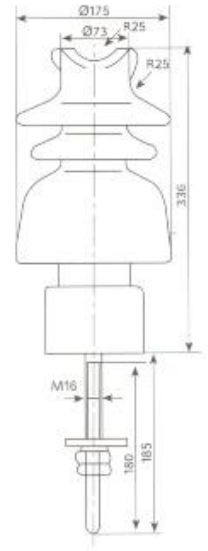

PSH1-20/125

MAIN DEMENSTIONS AND STANDARD PARTICULARS

Cat.No.		VKS35-S	VKS35-N	PS-15/500	PSH1-20/125	
Leakage distance/in mm		900	720	375	520	
Dry arcing distance/in mm					260	
Cantilever strength/1b kN		8	8	13	125	
Average flashover voltage	Low-frequency	Dry/kV	100	100	80	90
		Wet/kV	70	70	60	65
	Critical impulse	Positive/ kV	170	170		150
		Negative /kV				
Radio-influence voltage data	Test voltage to ground /kV				22	
	Maximum RIV at 1.000kc /µV				100	