


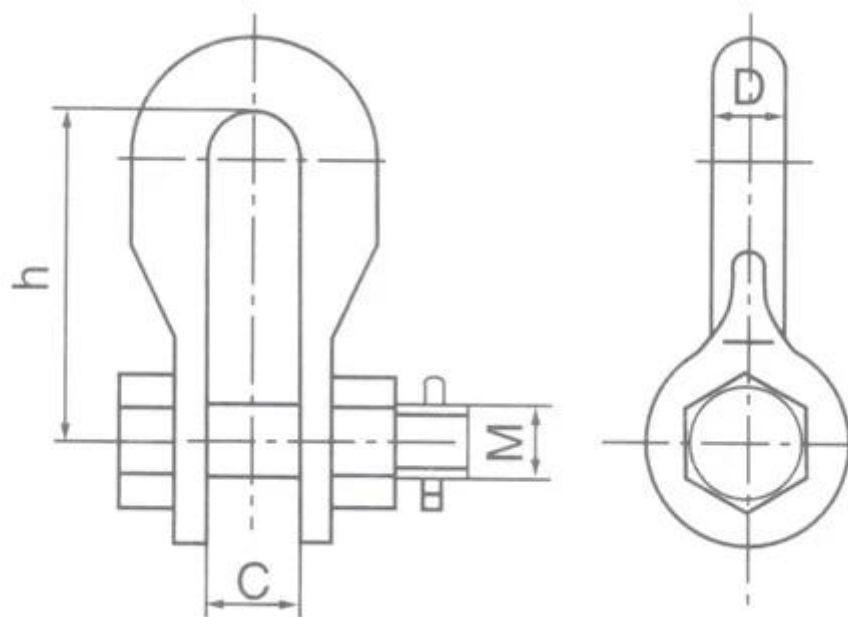

| Cat. No. | dimensions(mm) |    |    |     | rated failure load<br>kN | Weight<br>kg |
|----------|----------------|----|----|-----|--------------------------|--------------|
|          | C              | M  | D  | h   |                          |              |
| U-7      | 20             | 16 | 16 | 60  | 70                       | 0.5          |
| U-10     | 22             | 18 | 18 | 70  | 100                      | 0.6          |
| U-12     | 24             | 22 | 20 | 80  | 120                      | 1.0          |
| U-16     | 26             | 24 | 22 | 90  | 160                      | 1.5          |
| U-20     | 30             | 27 | 24 | 100 | 200                      | 2.3          |
| U-25     | 34             | 30 | 26 | 110 | 250                      | 2.8          |
| U-30     | 38             | 36 | 30 | 130 | 300                      | 3,7          |
| U-50     | 44             | 42 | 36 | 150 | 500                      | 7.0          |