



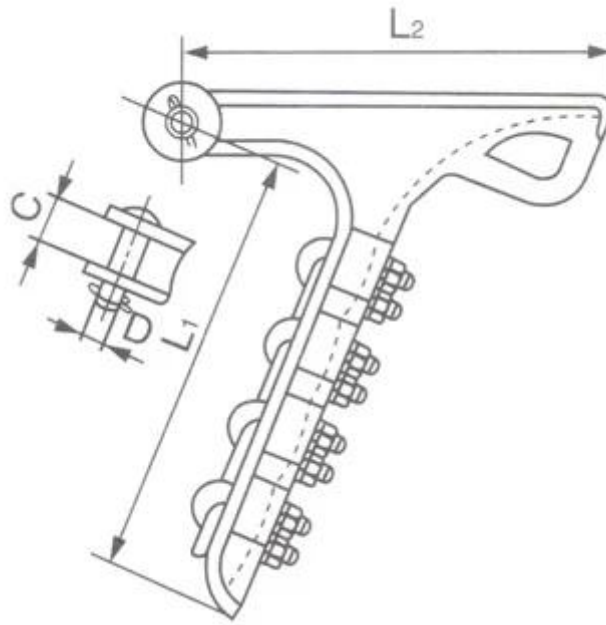

Cat. No.	conductor Dia.(mm)	dimensions(mm)				U Bolt pc	U.T.S kN	Weight kg
		D	C	L ₁	L ₂			
NLL-1	5.1-11.4	16	19	126	108	2	40	0.5
NLL-2	10.9-15.5	16	24	176	187	2	40	1.8
NLL-3	15.0-21.0	16	17.5	190	203	3	70	1.9
NLL-4	18.1-24.8	16	30	298	284	4	90	4.1
NLL-5	24.0-30.0	24	36	446	342	5	120	7.0
NLL-1A	4.57-13.21	16	16	114	137	2	35	1.0
NLL-5A	8.0-30.0	18	32	190	238	3	80	3.5
NLL-6A	30.0-38.0	18	39	260	245	3	80	4.2

the boy and keeper are made of aluminium alloy, the cotter-pin is made of stainless steel,

the other parts are made of hot-dip galvanized steel.

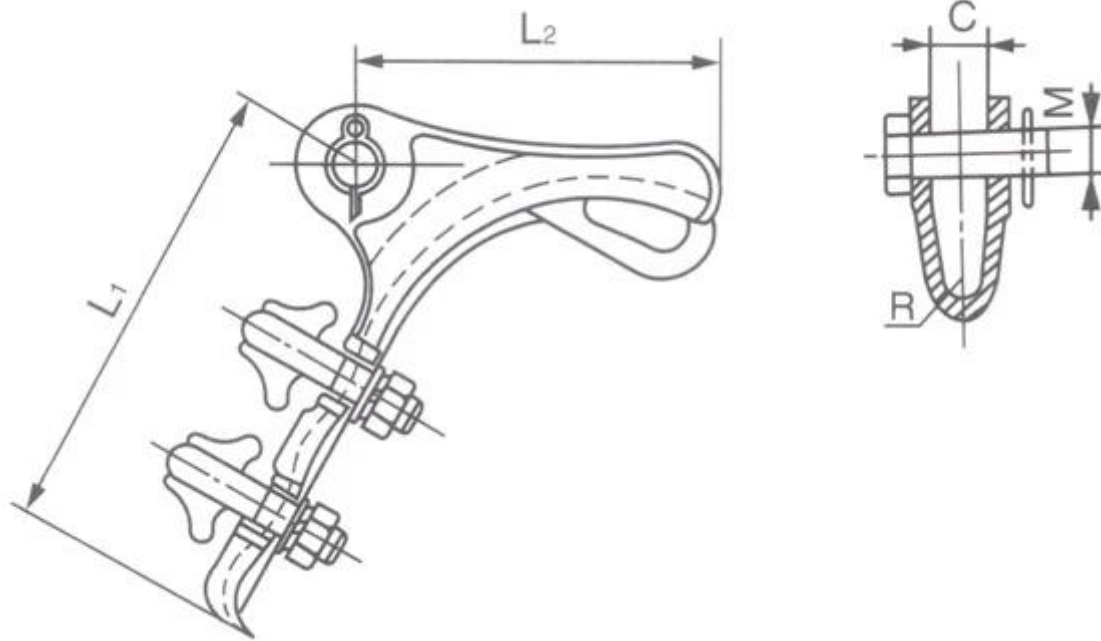

Cat. No.	conductor Dia.(mm)	dimensions(mm)					U Bolt		U.T.S kN	Weight kg
		M	C	L_1	L_2	R	Q'ty	Dia. mm		
NLD-1	5.0-10.0	16	18	150	120	6.5	2	12	20	1.3
NLD-2	10.1-14.0	16	18	205	130	8.0	3	12	40	2.1
NLD-3	14.1-18.0	18	22	310	160	11.0	4	16	70	4.6
NLD-4	18.1-23.0	18	25	410	220	12.5	4	16	90	7.1

the body and keeper are made of malleable iron. the cotter-pin is made of stainless steel.

the other parts are made of hot-dip galvanized steel.