

Fig1

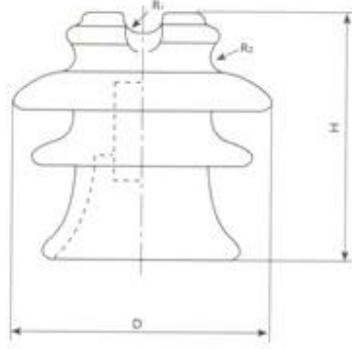


Fig2

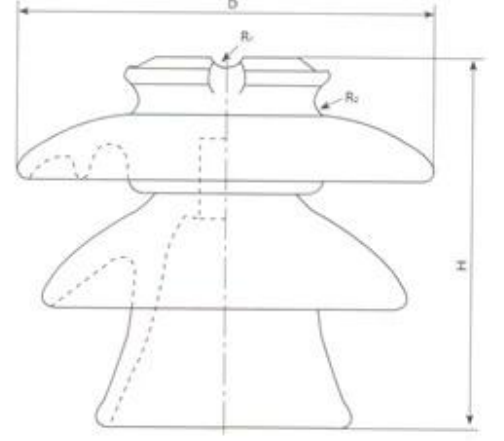


Fig3

### ANA BOYUTLAR VE STANDART ÖZELLİKLER

| Cat.No | Sır           | Şek. | Nominal voltaj kV | Ana boyutlar |        |       |       | Kaçak mesafesi içinde | Konsol gücü<br>1 pound =<br>0.45 kg. | Güç frekansı gerilimi |                    |            |
|--------|---------------|------|-------------------|--------------|--------|-------|-------|-----------------------|--------------------------------------|-----------------------|--------------------|------------|
|        |               |      |                   | 'H           | D      | R1,   | R2,   |                       |                                      | Kuru flashover kV     | Islak flashover kV | delinme kV |
| Y10K27 | Sade          | 1    | 3.3 / 6.6         | 4 5/16       | 4      | 3/8   | 3/8   |                       | 2400                                 | 60                    | 35                 | 95         |
| Y10K28 | Radyo serbest | 1    | 3.3 / 6.6         | 4 5/16       | 4      | 3/8   | 3/8   |                       | 2400                                 | 60                    | 35                 | 95         |
| Y10K29 | Sade          | 2    | 11                | 5 1/8        | 5 1/2  | 1/2   | 3/8   | 9 1/2                 | 2400                                 | 75                    | 50                 | 150        |
| Y10K30 | Radyo serbest | 2    | 11                | 5 1/8        | 5 1/2  | 1/2   | 3/8   | 9 1/2                 | 2400                                 | 75                    | 50                 | 150        |
| Y10K31 | Sade          | 2    | 15                | 5 3/8        | 6      | 1/2   | 3/8   | 11 3/4                | 2400                                 | 80                    | 55                 | 150        |
| Y10K32 | Radyo serbest | 2    | 15                | 5 3/8        | 6      | 1/2   | 3/8   | 11 3/4                | 2400                                 | 80                    | 55                 | 150        |
| Y10K33 | Sade          | 3    | 22                | 7 1/16       | 9 1/16 | 16/07 | 3/8   | 17                    | 3000                                 | 115                   | 75                 | 200        |
| Y10K34 | Radyo serbest | 3    | 22                | 7 1/16       | 9 1/16 | 16/07 | 3/8   | 17                    | 3000                                 | 115                   | 75                 | 200        |
| Y10K35 | Sade          | 3    | 33                | 9 5/8        | 11     | 16/07 | 16/07 | 24 4/5                | 3000                                 | 130                   | 95                 | 210        |
| Y10K36 | Radyo serbest | 3    | 33                | 9 5/8        | 11     | 16/07 | 16/07 | 24 4/5                | 3000                                 | 130                   | 95                 | 210        |

| Cat.No | Bir dakika güç frekansı kV |               | % 50 dürtü flaşör voltajı |            | Radyo etkisi gerilimi  |                                 | Daha önce kullanılan numara |
|--------|----------------------------|---------------|---------------------------|------------|------------------------|---------------------------------|-----------------------------|
|        | Kuru dayanım               | Islak dayanım | Pozitif kV                | Negatif kV | Zemine voltaj testi kV | 1000kHz $\mu$ V'de Maksimum RIV |                             |
| Y10K27 | 50                         | 30            | 95                        | 120        | 10                     | 5500                            | P-6-Y                       |
| Y10K28 | 50                         | 30            | 95                        | 120        | 10                     | 50                              | P-6-Y                       |
| Y10K29 | 65                         | 45            | 115                       | 150        | 15                     | 8000                            | P-11-Y                      |
| Y10K30 | 65                         | 45            | 115                       | 150        | 15                     | 100                             | P-11-Y                      |
| Y10K31 | 70                         | 50            | 130                       | 175        | 15                     | 8000                            | P-15-Y                      |
| Y10K32 | 70                         | 50            | 130                       | 175        | 15                     | 100                             | P-15-Y                      |
| Y10K33 | 100                        | 70            | 180                       | 240        | 22                     | 12000                           | P-22-Y                      |
| Y10K34 | 100                        | 70            | 180                       | 240        | 22                     | 100                             | P-22-Y                      |
| Y10K35 | 115                        | 90            | 215                       | 290        | 30                     | 16000                           | P-33-Y                      |
| Y10K36 | 115                        | 90            | 215                       | 290        | 30                     | 100                             | P-33-Y                      |